





Variable speed V-belt pulleys

## Double pulley drive for standard V-belts

**KRM + RF P<sub>1 max.</sub> = 5,5 kW**

These drive units are designed for use with standard V-belts in special applications. The KRM type pulleys are designed as smooth pulleys and RF types with interlacing pulley sheaves.

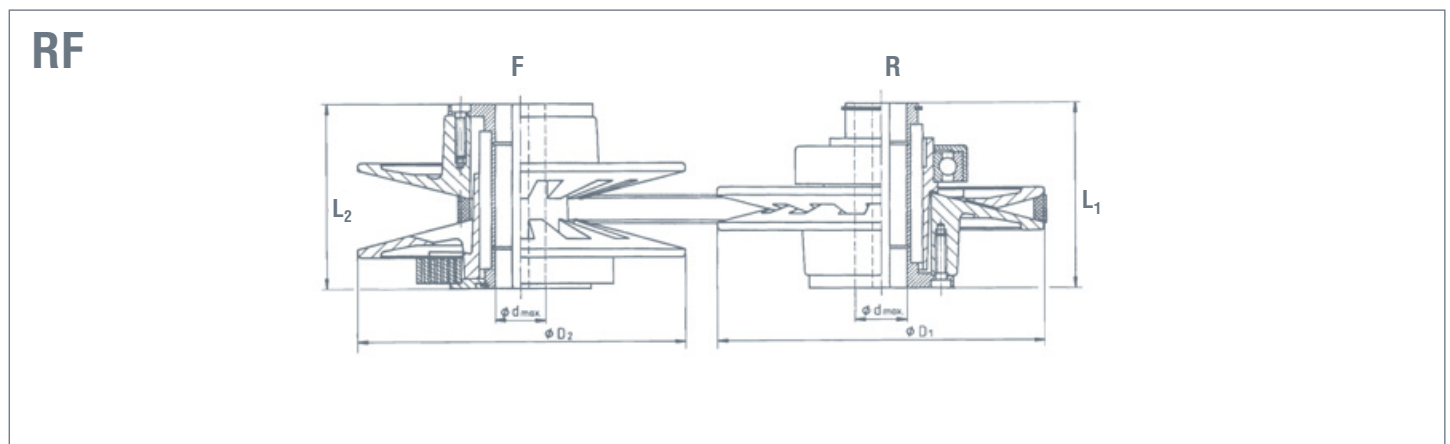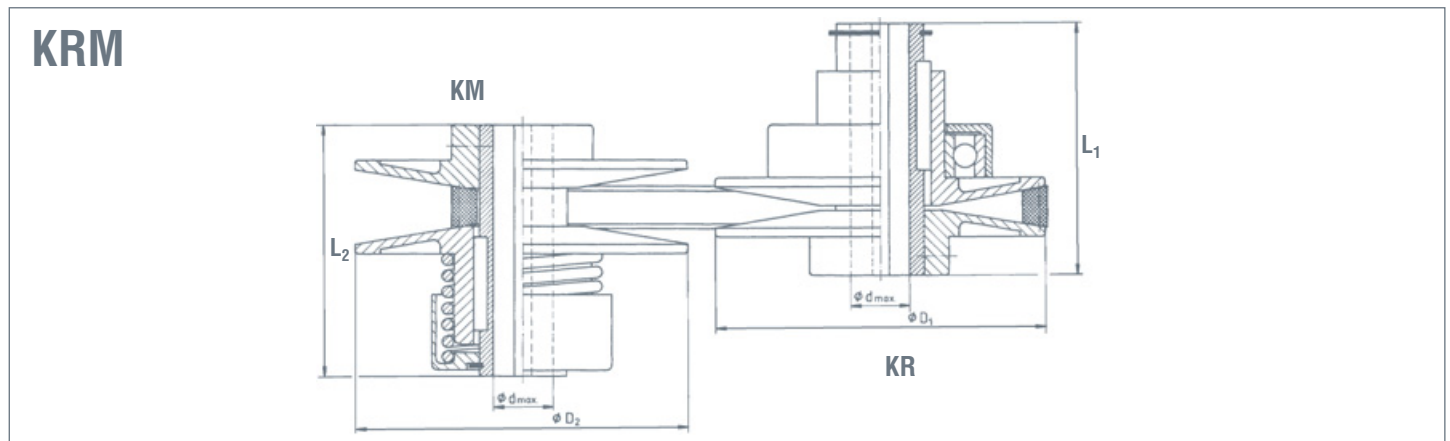

**KRM:**

Type	Speed range	Motor	kW	n max.	n min.	P max.	P min.	D <sub>1</sub>	L <sub>1</sub>	D <sub>2</sub>	L <sub>2</sub>	d <sub>max.</sub>	Standard V-belt
KRM 80.10	1:6,0	1370	0,37	3350	560	0,33	0,13	80	60	80	65	14	10 x 6
KRM 105.13	1:6,0	1370	0,75	3350	560	0,68	0,40	105	80	105	80	20	13 x 8
KRM 127.17	1:6,0	1420	1,1	3480	580	1,0	0,44	127	80	127	80	25	17 x 11

**RF:**

Type	Speed range	Motor	kW	n max.	n min.	P max.	P min.	D <sub>1</sub>	L <sub>1</sub>	D <sub>2</sub>	L <sub>2</sub>	d <sub>max.</sub>	Standard V-belt
RF 100	1:5,0	1370	0,37	3065	612	0,33	0,15	110	72	110	72	24	10 x 6
RF 150	1:6,5	1410	1,5	3595	553	1,35	0,46	158	90	158	90	28	13 x 8
RF 210	1:8,0	1420	3,0	4010	502	2,7	1,1	220	122	220	122	32	17 x 11
RF 280	1:8,5	1450	5,5	4230	497	4,9	2,6	292	162	292	162	42	22 x 14