
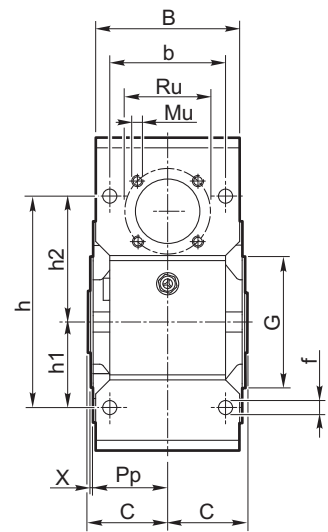


4.7 Dimensioni



4.7 Dimensions


4.7 Abmessungen

HA

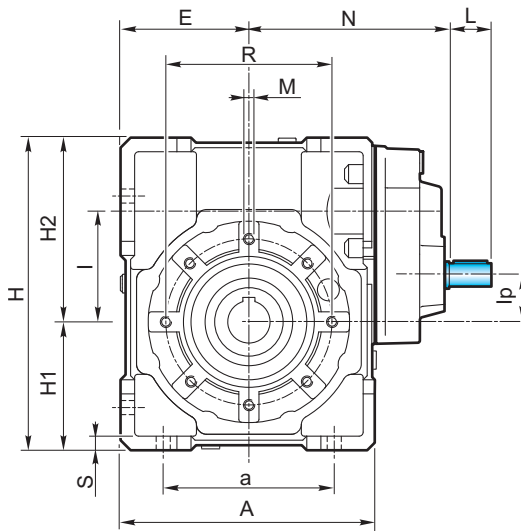


HF

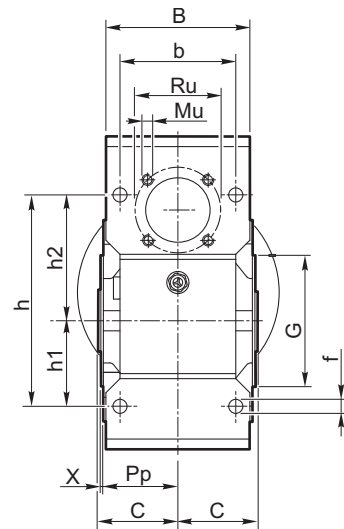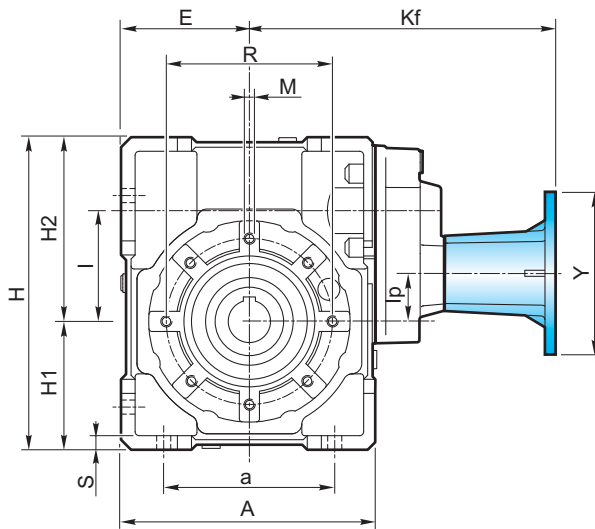






Flangia pendolare / Shaft-mounted flange / Aufsteckflansch

40 - 50


4 Fori / Holes / Bohrungen

63 - 75 - 90 - 110


8 Fori / Holes / Bohrungen

 Albero uscita cavo
Output hollow shaft
Abtriebshohlwelle

 Albero entrata
Input shaft
Antriebswelle


H	A	a	B	b	b _e	b ₂	C	d _e j6	D ₂ H7	E	f	G h8	H	H ₁	H ₂	h	h ₁	h ₂		
40	105	70	71	60	3	6	6	39	9	18	19	50	6.5	60	125	50	75	90	35	55
50	125	80	85	70	4	8	8	46	11	25	24	60	8.5	70	150	60	90	104	40	64
63	147	100	103	85	5	8	—	56	14	25	—	72	9	80	182	72	110	130	50	80
75	176	120	112	90	6	8	8	60	19	28	30	86	11	95	219.5	86	133.5	153	60	93
90	203	140	130	100	6	10	—	70	19	35	—	103	13	110	248.5	103	145.5	172	70	102
110	252.5	170	143	115	8	12	—	77.5	24	42	—	127.5	14	130	310.5	127.5	183	210	85	125

H	I	I _p	L	M	M _e	M _u	N	P _p	R	R _u	S	t _e	t ₂	X	
40	40	5	15	M6X10	M4X12	M5X10	91.5	36.5	75	42.4	6	10.2	20.8	21.8	1.5
50	50	10	20	M8x10	M4x12	M6x10	104.5	43.5	85	53.7	7	12.5	28.3	27.3	1.5
63	63	16.5	25	M8x14	M4x10	M6x12	121	53	95	60.8	8	16	28.3	—	2
75	75	22	30	M8x14	M6x16	M8x12	147.75	57	115	70.7	10	21.5	31.3	33.3	2
90	90	37	30	M10x18	M6x16	M8x14	157.75	67	130	70.7	12	21.5	38.3	—	2
110	110	47	40	M10x18	M8x22	M10x18	196.5	74	165	85.0	14	27	45.3	—	2.5


Dimensioni attacco flangia entrata

Dimensions of the input mounting flange

Abmessungen des Eintriebsflansches

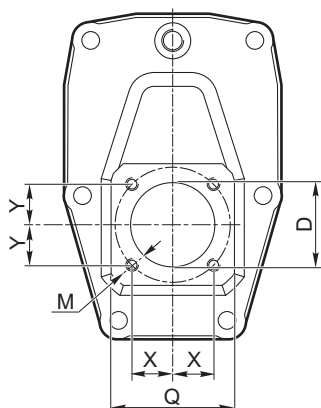

H	D	M	Q	X	Y
40	26	M5x9	40	12.5	12.5
50	32	M5x9	45	15	15
63	40	M6x12	53	19	19
75	47	M6x12	62	21.5	21.5
90	47	M6x12	62	21.5	21.5
110	52	M8x15	75	25	25





Flangia uscita

Output flange


Abtriebsflansch

Vista da A / View from A / Ansicht von A

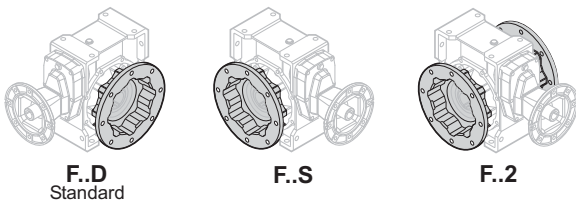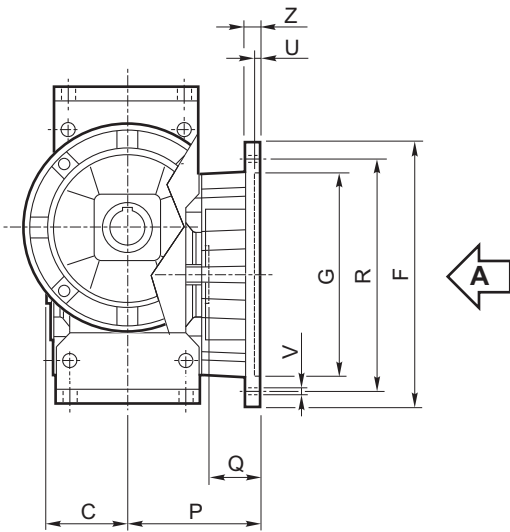

40	50		
F1	F1		
F2	—		F2
—	—		F3
40 - 50			
63	75		
F1	F1		
F2	—		F2
—	—		F3
63 - 75			
90	110		
—	F1		F1
—	—		F2
—	—		F3
90 - 110			

Tipo Type Typ	C	F		G H8	P	Q	R	U	V			Z
											Ø	
40	39		85	60	67	28	75-90	4	n* 4		9	8
			85	60	97	58	75-90	4	n* 4		9	8
		140	95	80	41	115	5		n* 7	9	10	
50	46		94	70	90	44	85-100	5	n* 4		11	10
		160	110	89	43	130	5		n* 7	11	11	
63	56		142	115	82	26	150	5	n* 4		11	11
			142	115	112	56	150	5	n* 4		11	11
		160	110	80.5	24.5	130	5		n* 4	11	12	
75	60		160	130	111	51	165	5	n* 4		13	12
		160	110	90	30	130	6		n* 4	11	13	
90	70	200		152	111	41	175	5	n* 4		13	12
		200		152	151	81	175	5	n* 4		13	13
		200		130	110	40	165	6		n* 4	11	11
110	77.5	260		170	131	53.5	230	6		n* 8	13	15
		250		180	150	72.5	215	5		n* 4	15	16




4.7 Dimensioni

4.7 Dimensions

4.7 Abmessungen

Flangia entrata / Input flange / Antriebsflansch

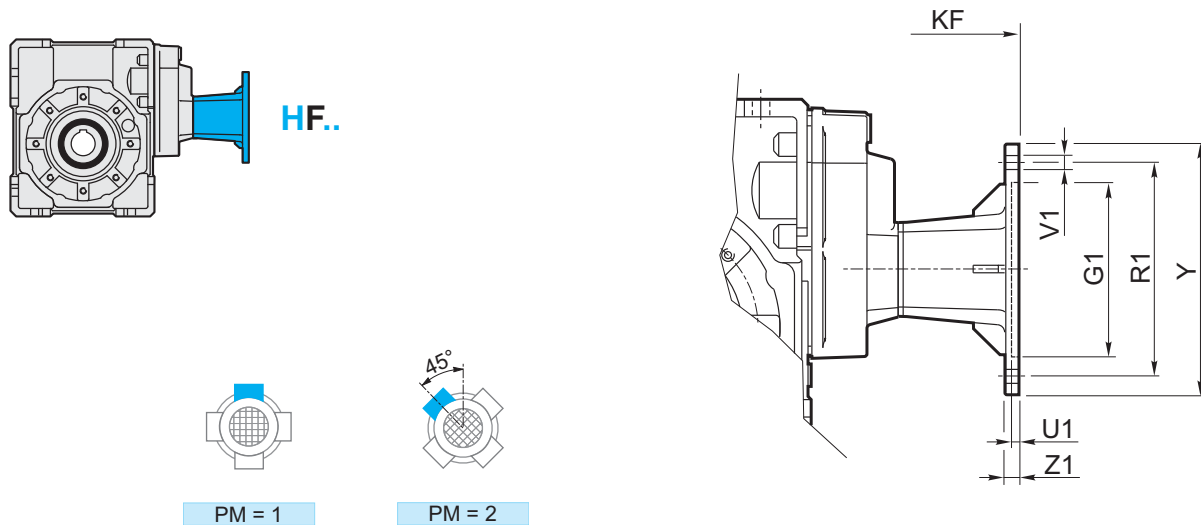

HF	IEC	PM		G ₁ H7	K _F	R ₁	U ₁	V ₁			Y	Z ₁
		1	2					Ø				
40	56 B5	•	•	80	129.5	100	3.5	7		8	120	8
	56 B14		•	50	129.5	65	3.5	6		4	80	8
	63 B5	•	•	95	132.5	115	4	9		8	140	10
	63 B14	•	•	60	132.5	75	3.5	6		8	90	8
50	56 B5	•	•	80	148.5	100	3.5	7		8	120	8
	63 B5	•	•	95	151.5	115	4	9		8	140	10
	63 B14	•	•	60	151.5	75	3.5	6		8	90	8
	71 B5	•	•	110	158.5	130	4.5	9		8	160	10
	71 B14	•	•	70	158.5	85	4	7		8	105	10
63	63 B5	•	•	95	173	115	4	9		8	140	10
	71 B5	•	•	110	180	130	4.5	9		8	160	10
	71 B14		•	70	180	85	3.5	7		4	105	10
	80 B5	•	•	130	190	165	4.5	11		8	200	10
	80 B14	•	•	80	190	100	4	7		8	120	10
75	71 B5	•	•	110	212	130	4.5	9		8	160	10
	80/90 B5	•	•	130	232	165	4.5	11		8	200	10
	80 B14	•	•	80	222	100	4	7		8	120	10
	90 B14	•	•	95	232	115	4	9		8	140	10
90	71 B5	•	•	110	222	130	4.5	9		8	160	10
	80/90 B5	•	•	130	242	165	4.5	11		8	200	10
	80 B14	•	•	80	232	100	4	7		8	120	10
	90 B14	•	•	95	242	115	4	9		8	140	10
110	80/90 B5	•	•	130	294.5	165	4.5	11		8	200	10
	90 B14		•	95	294.5	115	4	9		4	140	10
	100/112 B5	•	•	180	304.5	215	5	14		8	250	14
	100/112 B14	•	•	110	304.5	130	4.5	9		8	160	10

N.B.: Il montaggio STD di P_M=2 solo quando non è possibile il montaggio STD di P_M=1.

N.B.: STD mounting of P_M=2 only if STD mounting of P_M=1 is not possible.

ANMERKUNG: STD Montage von P_M=2 nur wenn STD Montage von P_M=1 unmöglich ist.