

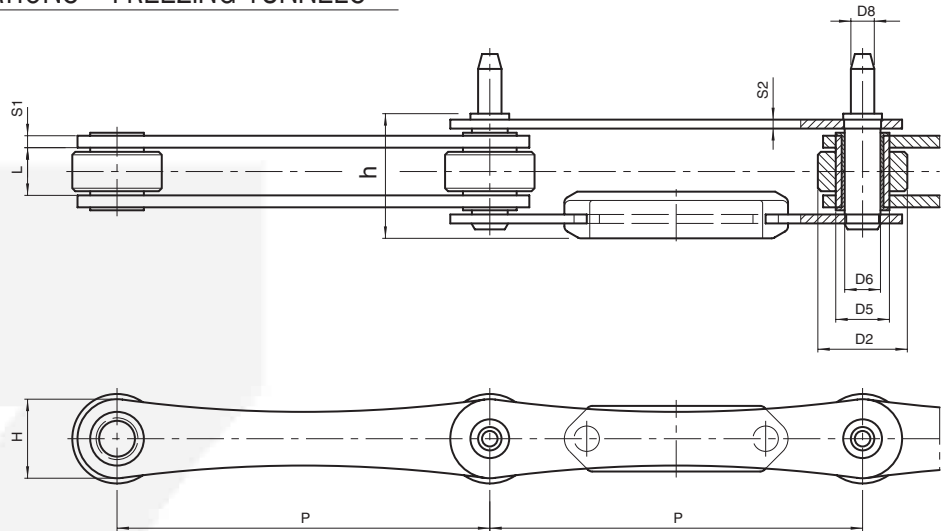


CHAINS FOR SPECIAL APPLICATIONS – FREEZING TUNNELS

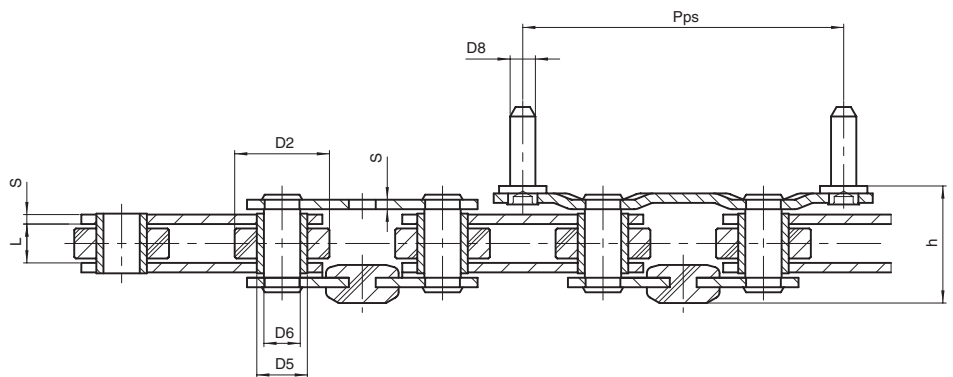

HARDENING TUNNEL

| Chain N. | P mm | L mm | D2 mm | D5 mm | D6 mm | D8 mm | H mm | S1/S2 mm | h mm | Breaking load N |
|----------|-------|------|-------|-------|-------|-------|------|----------|------|-----------------|
| W4577* | 63,5 | 10 | 30 | 18 | 10 | 7,9 | 26,5 | 3 | 31,2 | 30.000 |
| W5071* | 95,25 | 16 | 30 | 18 | 11,9 | 9 | 26,5 | 4/3 | 36,8 | 40.000 |
| W4530* | 125 | 14 | 30 | 18 | 11,8 | 7,9 | 26,5 | 4/3 | 36,5 | 45.000 |
| W4578* | 125 | 16 | 30 | 18 | 11,8 | 7,9 | 26,5 | 4/3 | 39,8 | 40.000 |
| W4967* | 127 | 10 | 30 | 16 | 11,5 | 7,9 | 26,5 | 3 | 31,3 | 30.000 |
| W4899* | 150 | 16 | 30 | 18 | 11,9 | 7,9 | 26,5 | 4/3 | 42,8 | 40.000 |

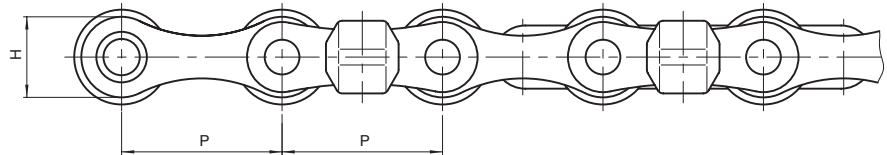

HARDENING TUNNEL


| Chain N. | P mm | L mm | D2 mm | D5 mm | D6 mm | D8 mm | H mm | S mm | h mm | Pps mm | Breaking load N |
|----------|------|------|-------|-------|-------|-------|------|------|------|--------|-----------------|
| W4813* | 50,8 | 10 | 30 | 16 | 11,5 | 8 | 25,2 | 3 | 29,3 | 101,6 | 34.000 |

* stainless steel chain




CHAINS FOR SPECIAL APPLICATIONS – FREEZING TUNNELS

HARDENING TUNNEL

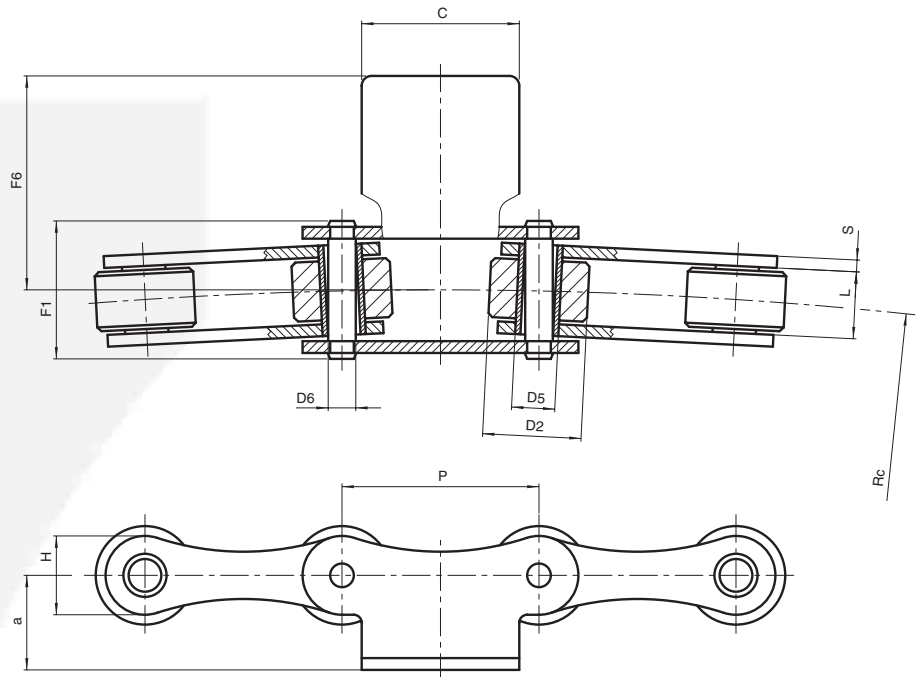

| Chain N. | P mm | L mm | D2 mm | D5 mm | D6 mm | H mm | S mm | F1 mm | a mm | c mm | F6 mm | Breaking load N | Notes |
|----------|------|------|-------|-------|-------|------|------|-------|------|------|-------|-----------------|----------------------------|
| W1947* | 50 | 17 | 25 | 11 | 7 | 20 | 3 | 33,5 | -24 | 40 | 54 | 30.000 | attachm. position variable |

HARDENING TUNNEL

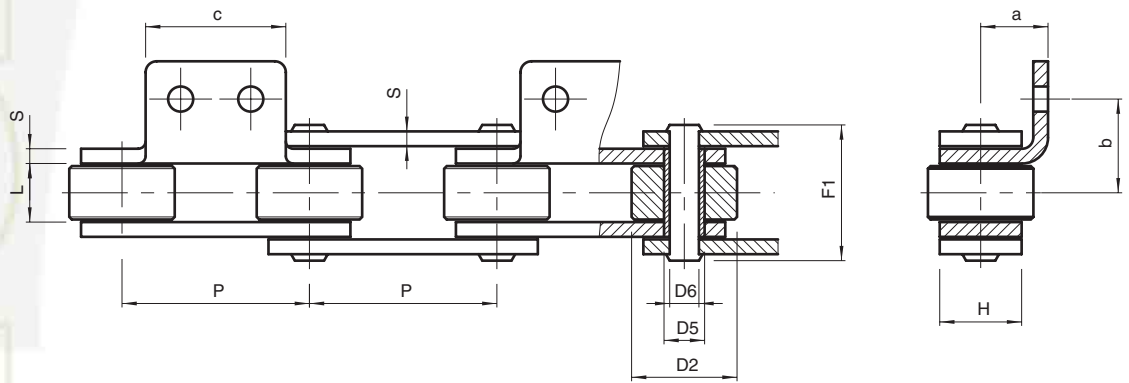

| Chain N. | P mm | L mm | D2 mm | D5 mm | D6 mm | H mm | S mm | F1 mm | a mm | b mm | c mm | Breaking load N |
|-----------|------|------|-------|-------|-------|------|------|-------|-------|------|------|-----------------|
| W4528ASS* | 50,8 | 15,9 | 28,6 | 11 | 7,9 | 22,2 | 4 | 36,5 | 18,25 | 25,4 | 38 | 25.000 |

* stainless steel chain

